# Technical data sheet
# VISIO 3 L

200

OPTIONS



| | |
|---|---|
| **Support frame** | |
| Black, 6mm | ✓ |
| Stainless steel, 6mm | ✓ |
| **Window frame** | |
| Black | ✓ |
| Stainless steel | ✓ |
| **Handles** | |
| Oak wood handle dark stained | ✓ |
| Stainless steel | ✓ |
| Steel black | ✓ |
| **AIR-System** | |
| for room air independent installation | ✓ |
| **Heat-storage module©** | |
| Heat-storage module© | 70 kg |



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200

# Technical data sheet
# VISIO 3 L

PRODUCT INFORMATION

| | |
|---|---|
| **Weight depending on model/equipment** | |
| Weight depending on model/equipment | 283 - 325 kg |
| **Ø Smoke outlet** | |
| Ø Smoke outlet | 200 mm |
| **Ø Air inlet** | |
| Ø Air inlet | 150 mm |
| **Certifications** | |
| Energy efficiency class | A+ |
| Eco Design | ✓ |
| EN NORM 6.4.23 | EN 13229 |
| BImSchV | Stufe 2 |
| Flamme Verte | ✓ |
| Classe energetica di appartenenza | 3 Stelle |



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

attika
FEUERKULTUR

# Technical data sheet
# VISIO 3 L

200

SERVICES

| Thermal output | |
|---|---|
| Nominal heat output | 10.3 kW |
| Thermal output range min./max. | 8-12 kW |
| Fuelwood requirement | 3 ≈ kg/h |
| Energy efficiency | 81 % |
| **Triple values** | |
| Exhaust gas mass flow | 11.3 g/s |
| Exhaust temperature | 225 °C |
| Required delivery pressure | 12 Pa |
| Required delivery pressure at 0.8 times the nominal heat output | 10 Pa |
| **Fire safety** | |
| Dust at 13 % O2 | 28 mg/Nm$^3$ |
| CO emission at 13 % O2 | 0.098 % |
| CO emission at 13 % O2 | 1226 mg/Nm$^3$ |
| CO2 concentration | 8.7 % |
| OGC at 13 % O2 | 68 mg/Nm$^3$ |
| NOx at 13 % O2 | 73 mg/Nm$^3$ |

INSTALLATION

| Furniture distance from the front glass | |
|---|---|
| A: Furniture distance from the front glass | 1100 mm |
| **Furniture distance from the side glass** | |
| B: Furniture distance from the side glass | 700 mm |



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200

# Technical data sheet
# VISIO 3 L

200


CONVECTION AIR

| | |
|---|---|
| Convection air above | min. 1000 $cm^2$ |
| Convection air below | min. 500 $cm^2$ |

Note

Maximum weight supported by the frame: 200 kg.

Installation

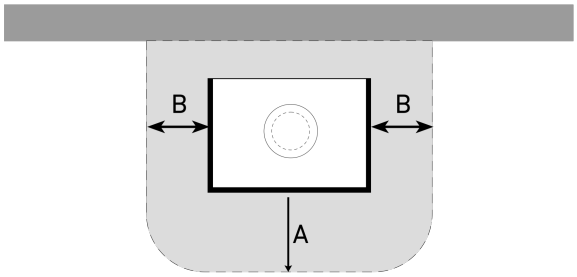




ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200