Technical data sheet
VISIO 3 UNIQ

200

OPTIONS

Support frame	
Black, 6mm	✓
Stainless steel, 6mm	✓
Window frame	
Black	✓
Stainless steel	✓
Handles	
Oak wood handle dark stained	✓
Stainless steel	✓
Steel black	✓
AIR-System	
for room air independent installation	✓



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200

Technical data sheet
VISIO 3 UNIQ

PRODUCT INFORMATION

Weight depending on model/equipment	
Weight depending on model/equipment	268 kg
Ø Smoke outlet	
Ø Smoke outlet	200 mm
Ø Air inlet	
Ø Air inlet	150 mm
Certifications	
Energy efficiency class	A
Multiple occupancy	✓
Eco Design	✓
EN NORM	EN 13229
BImSchV	Stufe 2
Flamme Verte	✓
Classe energetica di appartenenza	4 Stelle

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

attika
FEUERKULTUR

Technical data sheet
VISIO 3 UNIQ

200

SERVICES

Thermal output	
Nominal heat output	9.3 kW
Thermal output range min./max.	7-11 kW
Fuelwood requirement	2.7 ≈ kg/h
Energy efficiency	78 %
Triple values	
Exhaust gas mass flow	10.6 g/s
Exhaust temperature	228 °C
Required delivery pressure	12 Pa
Required delivery pressure at 0.8 times the nominal heat output	10 Pa
Fire safety	
Dust at 13 % O2	23 mg/Nm^3
CO emission at 13 % O2	0.0714 %
CO emission at 13 % O2	893 mg/Nm^3
CO2 concentration	7.5 %
OGC at 13 % O2	57 mg/Nm^3
NOx at 13 % O2	113 mg/Nm^3

INSTALLATION

Furniture distance from the front glass	
A: Furniture distance from the front glass	1000 mm
Furniture distance from the side glass	
B: Furniture distance from the side glass	650 mm

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200

Technical data sheet
VISIO 3 UNIQ

200


CONVECTION AIR

Convection air above	min. 600 cm^2
Convection air below	min. 400 cm^2

Note

Maximum weight supported by the frame: 200 kg.

Installation

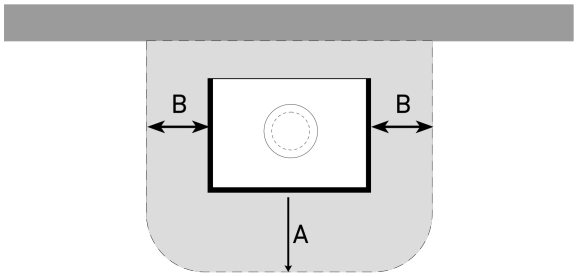

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200