Technical data sheet
VISIO 70 LC/RC

OPTIONS

Designframe (non supporting)	
Black	✓
Stainless steel	✓
Anti-reflective glass	
Anti-reflective glass	✓
Operating	
Remote control	Standard
attika fire app	Option
Home Automation	Option



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

Technical data sheet
VISIO 70 LC/RC

PRODUCT INFORMATION

Connections	
Flue pipe Ø (LAS)	130/200 mm
Gas connection	Ø 12 mm | 1/2" | 3/8"
Weight depending on model/equipment	
Weight depending on model/equipment	100 - 140 kg
Permissible chimney systems	
Schiedel Ontop Metaloterm	✓
Jeremias	✓
M&G Group	✓
Poujoulat	✓
Certifications	
Energy efficiency class	A
CE	EU 2016/426
SVGW	19-015-3

WEB2PRINT.PRODUKTINFORMATIONENBIOETHANOL

Certifications	
SVGW	✓

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

Technical data sheet
VISIO 70 LC/RC

200

SERVICES

Output range	
Natural gas	G20/20 mbar	1.1-7.6 kW
Propane gas	G31/50 mbar	1.8-9.1 kW
Gas consumption	
Natural gas	G20/20 mbar	0.99 m^3/h
Propane gas	G31/50 mbar	0.5 m^3/h
Maximum load	
Natural gas	G20/20 mbar	9.5 kW
Propane gas	G31/50 mbar	11.3 kW
Energy efficiency	
Efficiency class Natural gas	G20/20 mbar	1
Efficiency class Propane gas	G31/50 mbar	1

INSTALLATION

Furniture distance from the front glass	
A: Furniture distance from the front glass	500 mm
Furniture distance from the side glass	
B: Furniture distance from the side glass	500 mm

CONVECTION AIR

Convection air above	200 cm^2
Convection air below	200 cm^2


ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200

Technical data sheet
VISIO 70 LC/RC

200

Installation

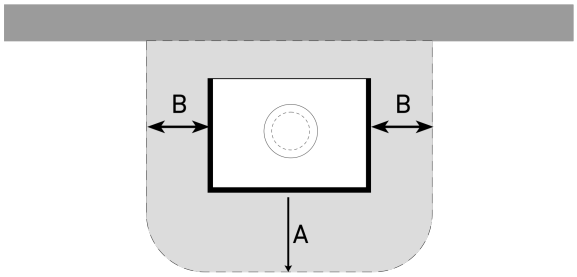

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200