

Technical data sheet

JUNO 120 L

200



OPTIONS

Firebox door	
Steel door	✓
Glass door	✓
Side window	
Without side window	✓
Two side windows	✓
Coating	
Black	✓
Platinum	✓
Mocha	✓
Cladding	
Soapstone	✓
Natural stone «porto»	✓
Handles	
Oak wood black	✓
«classic»	✓
Stainless steel	✓
Corian®	✓
Calf leather brown	✓
Calf leather black	✓
Oak nature	✓
Air control	
CleverAIR™	✓
Manual	✓



All information is provided without guarantee. Sketches are not true to scale.

23.04.2026 | 1 / 6

ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch

200




Technical data sheet

JUNO 120 L



AIR-System	
for room air independent installation	✓
Rotating console	
Rotating console	✓ With a rotating console, smoke outlet is only possible upwards.



6.4.23



Technical data sheet

JUNO 120 L

200



PRODUCT INFORMATION

Weight depending on model/equipment	
Weight depending on model/equipment	301 kg
Ø Smoke outlet	
Ø Smoke outlet	150 mm
Ø Air inlet	
Ø Air inlet	100 mm
Flue pipe outlet	
Top	✓
Rear	✓
Certifications	
Energy efficiency class	A
Multiple occupancy	✓
Eco Design	✓
EN NORM	EN 13240
MINERGIE® compatible	✓
DIBt	Z-43.12.425
BImSchV	Stufe 2
Flamme Verte	✓
Classe energetica di appartenenza	4 Stelle

All information is provided without guarantee. Sketches are not true to scale.

23.04.2026 | 3 / 6

ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch

200



Technical data sheet

JUNO 120 L

200



SERVICES

Thermal output	
Nominal heat output	5.6 kW
Thermal output range min./max.	3-7 kW
Fuelwood requirement	1.8 ≈ kg/h
Energy efficiency	80 %
Combustion air requirement	13 m ³ /h
Triple values	
Exhaust gas mass flow	4.4 g/s
Exhaust temperature	282 °C
Required delivery pressure	12 Pa
Required delivery pressure at 0.8 times the nominal heat output	10 Pa
Fire safety	
Dust at 13 % O ₂	6 mg/Nm ³
CO emission at 13 % O ₂	0.06 %
CO emission at 13 % O ₂	752 mg/Nm ³
CO ₂ concentration	10.9 %
OGC at 13 % O ₂	43 mg/Nm ³
NO _x at 13 % O ₂	80 mg/Nm ³

200



Technical data sheet

JUNO 120 L



INSTALLATION

Distances to combustible materials (without side window)	
A: to the back	75 mm
B: to the side wall	400 mm
C: to the front	850 mm
D: upwards	450 mm
Distances to combustible materials (with side window)	
A: to the back	75 mm
B: to the side wall	500 mm
C: to the front	800 mm
D: upwards	450 mm

Note

Please observe the national/regional regulations for floor protection.







Technical data sheet

JUNO 120 L



Sketches of safety distances

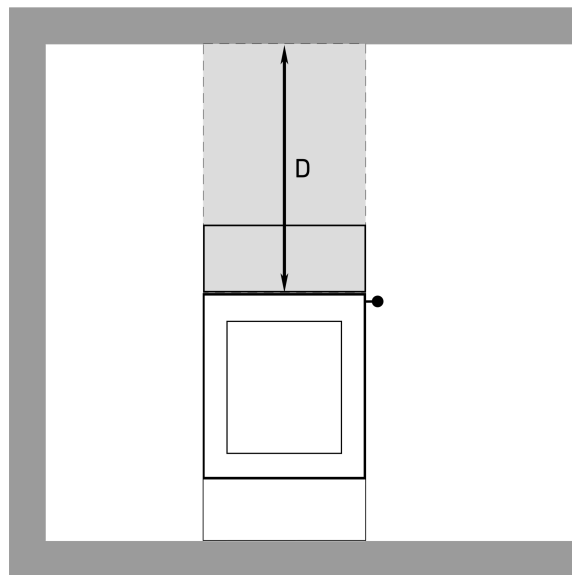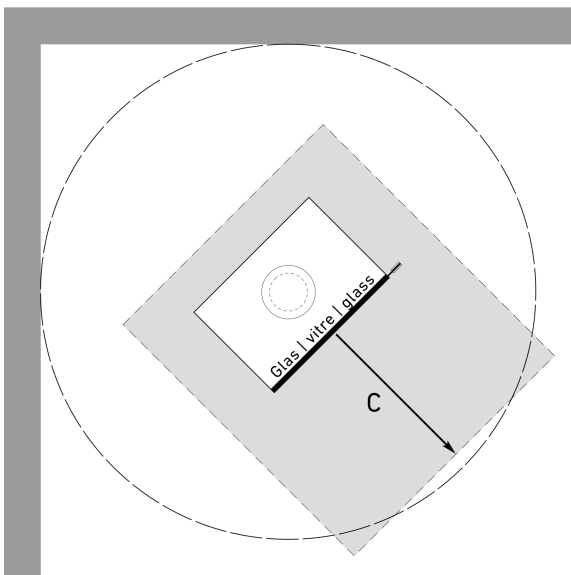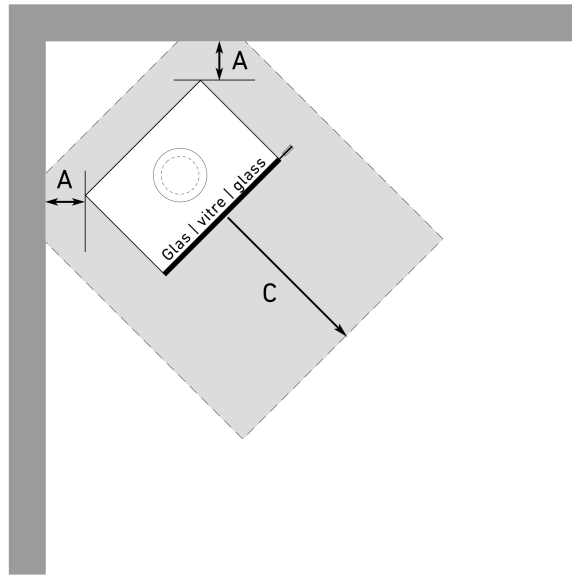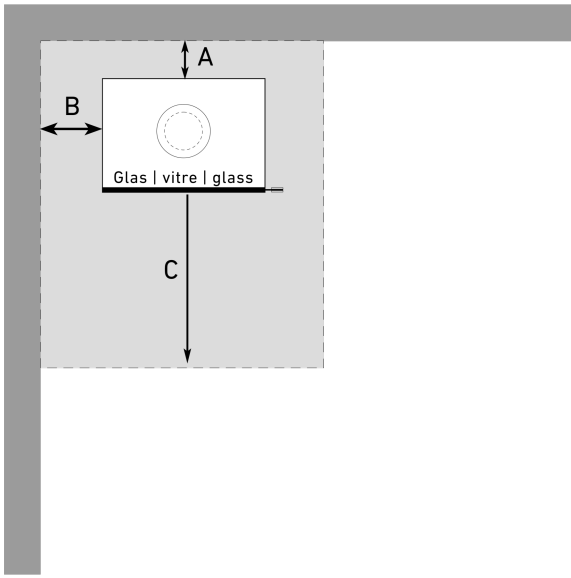

All information is provided without guarantee. Sketches are not true to scale.

23.04.2026 | 6 / 6

